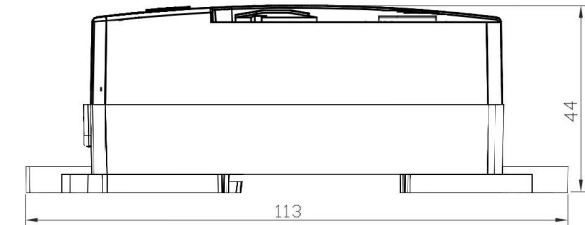

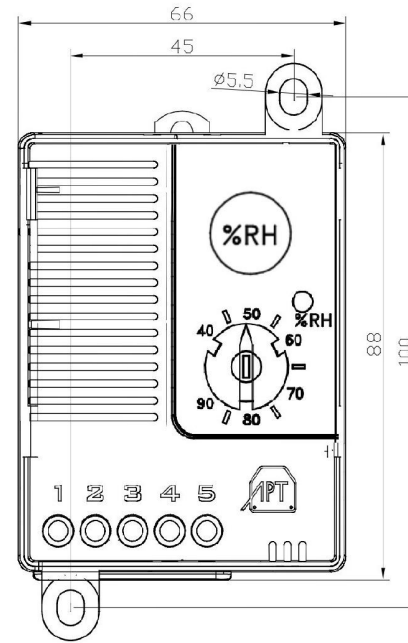




TECHNICAL DATA

Switching difference (Humidity)	4% RH ($\pm 3\%$ tolerance) at 25 °C /77 °F (50 %RH)
Response time	Approx 5 sec.
Contact type	Change-over contact (Relay)
Service life	>50,000 cycles
Max. switching capacity (Relay output)	250VAC, 5 (1) A
Connection	5-pole terminal, clamping torque 0.5 Nm max. solid/stranded ² wire - AWG 14 max. (2.5 mm ²)
Housing	Plastic, UL 94V-0, light grey
Mounting	Screw mounting for M5 bolt/Clip for 35 mm DIN rail
Mounting position	Vertical
Operating/Storage temperature	+32 to +140 °F (0 to +60 °C) / -4 to +158 °F (-20 to +70 °C)
Operating/Storage humidity	max. 95 %RH (non-condensing)
Protection Type	IP20



Sl. No.	PART NO.	OPERATING VOLTAGE	HUMIDITY SETTING RANGE
1	EEH	110-250 V AC, 50/60 Hz	40 to 90 %RH

MATERIAL AS STATED	 APT CONTROLS & APPLIANCES PRIVATE LIMITED Maharashtra State, INDIA.	PRODUCT: ELECTRONIC HYGROSTAT COMBI FITTING	
FINISH NATURAL		 ALL DIMENSIONS ARE IN mm	
UNSPECIFIED TOLERANCES ± 1.00	DRAWN BY yk	FOR: ENCLOSURES & PANELS Rev. 1	
	APPD. BY sy	DATE 01/09/2023	SCALE Not to Scale DRG.NO.