


TECHNICAL DATA

Operating Voltage [^]	110 - 250 V AC
Heating Element	PTC resistor - temperature limiting
Heater Body	Anodized Extruded Aluminium
Tolerance on Watts	± 10 % max
Mounting position	Vertical
Storage Temperature	-20 to 100 °C
Connection	3 Way Porcelain Connector
Terminals	Suitable for AWG 12 (2.5 mm ²) wires
Operating/ Storage Humidity	max 90% RH (non-condensing)
Protection Type	IP20
Protection Class	I (grounded)
Mounting	Through 2 Nos. 6.5 x 5.5 mm holes in bracket

[^] - Operating high voltage heaters below AC 140 V reduces heating performance by approx. 10%

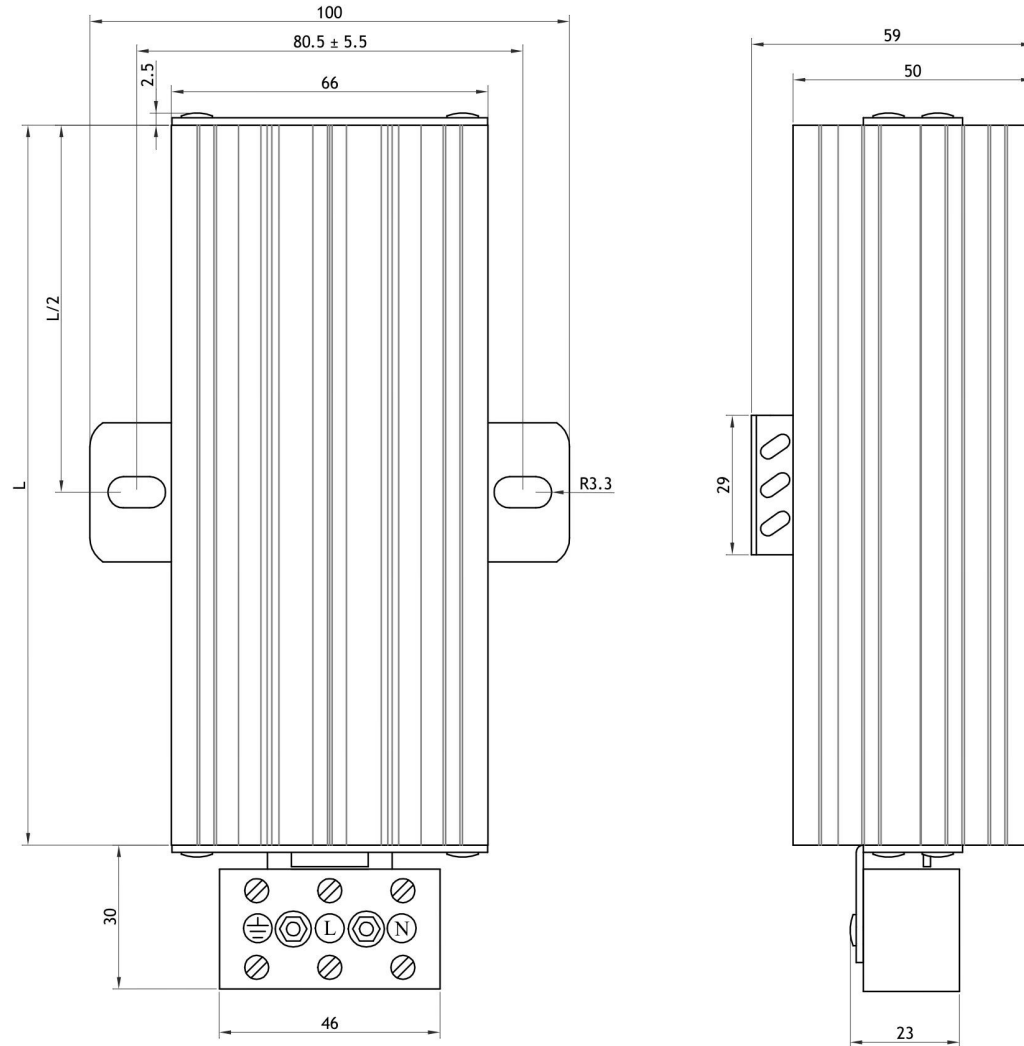

RATINGS & DIMENSIONS

Sl. No.	Length L in dwg. (mm)	Heating Capacity* @ 25 °C
1	70 ± 1	50 W
2	150 ± 1	80 & 100 W

* - Other ratings available on request

MATERIAL AS STATED	APT CONTROLS & APPLIANCES PRIVATE LIMITED Maharashtra State, INDIA.	PRODUCT: PANEL SPACE HEATER PTC TYPE WITH FIXING BRACKET	
FINISH NATURAL		FOR: ENCLOSURES & PANELS Rev. 0	
UNSPECIFIED TOLERANCES ± 1.00	DRAWN BY: yk	DATE: 29/09/2015	SCALE: Not to Scale
	APPD. BY:		DRG.NO.