



TECHNICAL DATA

Operating Voltage [^]	110 - 250 V AC
Heating Element	PTC resistor - temperature limiting
Heater Body	Anodized Extruded Aluminium
Tolerance on Watts	± 10 % max
Mounting position	Vertical
Storage Temperature	-70 to 100 °C
Connection	3 Way Porcelain Connector
Terminals	Suitable for AWG 12 (2.5 mm ²) wires
Operating/ Storage Humidity	max 95% RH (non-condensing)
Protection Type	IP20
Protection Class	I (grounded)
Mounting	Clip for 35 mm DIN rail

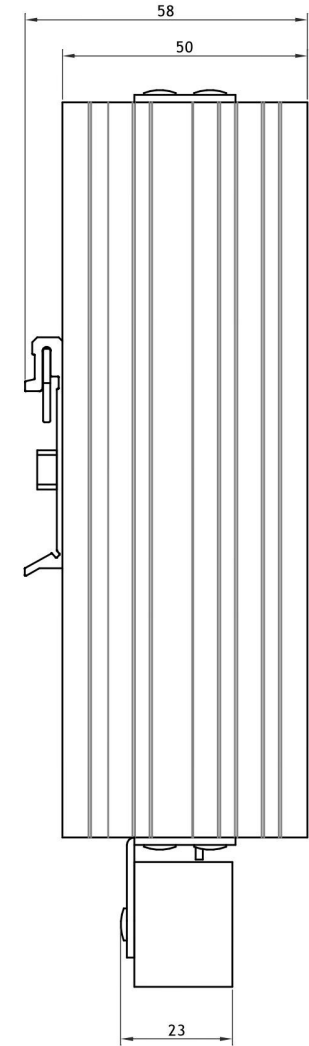

[^] - Operating high voltage heaters below AC 140 V reduces heating performance by approx. 10%

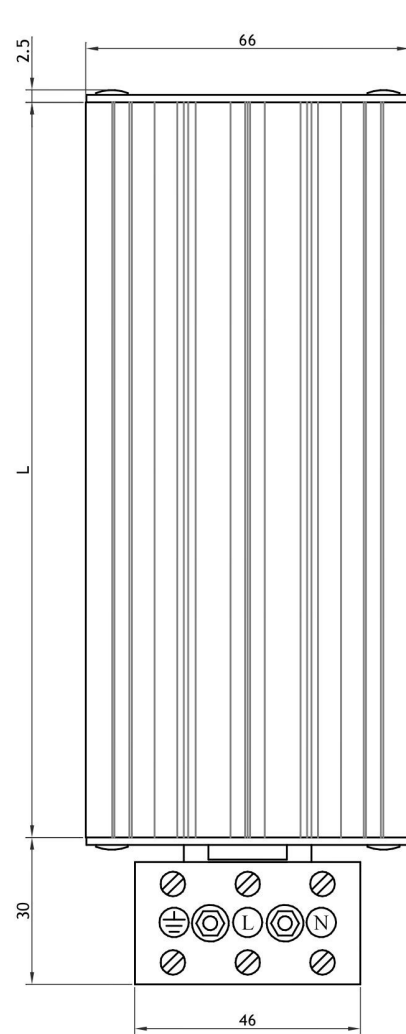

RATINGS & DIMENSIONS

Sl. No.	Length L in dwg. (mm)	Heating Capacity* @ 25 °C
1	70 ± 1	40 & 50 W
2	150 ± 1	80 & 100 W
3	200 ± 1	150 W

* - Other ratings available on request

MATERIAL AS STATED	 APT CONTROLS & APPLIANCES PRIVATE LIMITED Maharashtra State, INDIA.			
FINISH NATURAL	 ALL DIMENSIONS ARE IN mm	PRODUCT: PANEL SPACE HEATER PTC TYPE DIN RAIL MOUNTABLE		
UNSPECIFIED TOLERANCES ± 1.00	DRAWN BY	yk	FOR: ENCLOSURES & PANELS	Rev. 0
	APPD. BY		DATE 29/09/2015	SCALE Not to Scale DRG.NO.