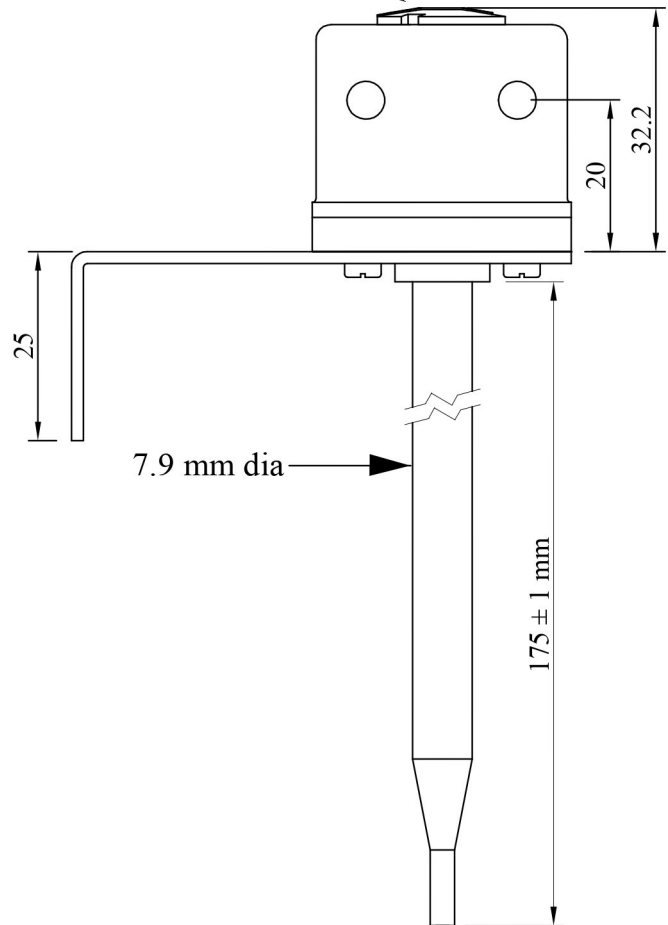




Pressure & Vibration resistant knob



Stem Length	175 mm
Temperature Range	0 - 60 / 10 - 90 / 25 - 75 / 30 - 90 / 30 - 120 deg. C
Tolerance on Operating Temperature	Within 6 deg. C
Differential	Maximum 10 deg. C
Insulation Level	2.0 kV for 1 minute
Contact Rating	20 A, 230 V, resistive
Contact configuration	Opening on temperature rise

NOTE:
FIXING BRACKET IS BLACK MATT EPOXY POWDER COATED.

MATERIAL AS STATED	 APT CONTROLS & APPLIANCES PRIVATE LIMITED Maharashtra State, INDIA.	
FINISH NATURAL	 ALL DIMENSIONS ARE IN mm	PRODUCT: THERMOSTAT Mk II, 175 mm WITH 'L' TYPE FIXING BRACKET
UNSPECIFIED TOLERANCES ±0.50	DRAWN BY yk	MADE FOR: SWITCH BOARDS & PANELS
	APPD. BY	DATE: 20/09/02 SCALE: Not To Scale Drg. No.